

# SHURflo's REMOTE SOLUTION

## Model 9300 Series

### SUBMERSIBLE PUMP APPLICATIONS:

- Irrigation
- Livestock Watering
- Remote Homes & Cabins
- Ponds
- Islands



SHURflo's NEW  
"Watertite-Gland" Design <sup>PAT. PEND.</sup>

**SHURflo's NEW 9300 Series Solar-Powered Submersible Pump. Rugged, Durable . . . and Built to Last!**

SHURflo's 9300 Series Pumps are backed by 25 years of research and engineering experience. Designed to be strong and yet lightweight, these pumps are easily repaired in the field. SHURflo provides a wide-range of parts and kits for ease of rebuilding and repair.

### "GLAND" CONNECTOR FEATURES:

- Waterblocked Electrical Connector.
- Impervious gland connection design prevents waterwicking. <sup>(Pat. Pend.)</sup>
- Quick Disconnect — No splicing necessary.
- Accepts a variety of jacketed cables.

### 9300 SERIES PUMP FEATURES:

- Strong Construction, yet lightweight (6 lbs.).
- Corrosion-proof housing with stainless-steel fasteners.
- Dry Running capability without pump damage.
- Internal Bypass Feature for pump protection.
- Long-life, 24 VDC Operation.
- Easily repaired in the field.
- 25 years of manufacturing experience with diaphragm pumps.
- State of the art solid diaphragm.

# SHURflo®


## Model 9300 Series

### 9300 SUBMERSIBLE PUMP FLOW CHART

TOTAL VERTICAL LIFT		FLOW RATE PER HOUR		SOLAR ARRAY SIZE MINIMUM TOTAL POWER RATING		CURRENT AMPS
FEET	METERS	GAL.	LTR.	WATTS		
20	6.1	111	420	58		1.7
40	12.2	109	413	65		2.0
60	18.3	105	398	78		2.3
80	24.4	103	390	89		2.6
100	30.5	100	379	99		2.9
120	36.6	95	360	104		3.2
140	42.7	93	352	115		3.5
160	48.8	89	337	123		3.8
180	54.9	87	329	135		4.0
200	61.0	84	318	141		4.3
230	70.1	79	300	155		4.6

**NOTE:** Use of an LCB (Linear Current Booster) Unit is required for optimum performance. Minimum total power rating shows minimum array watts required to perform as shown.

### EXPLODED VIEW

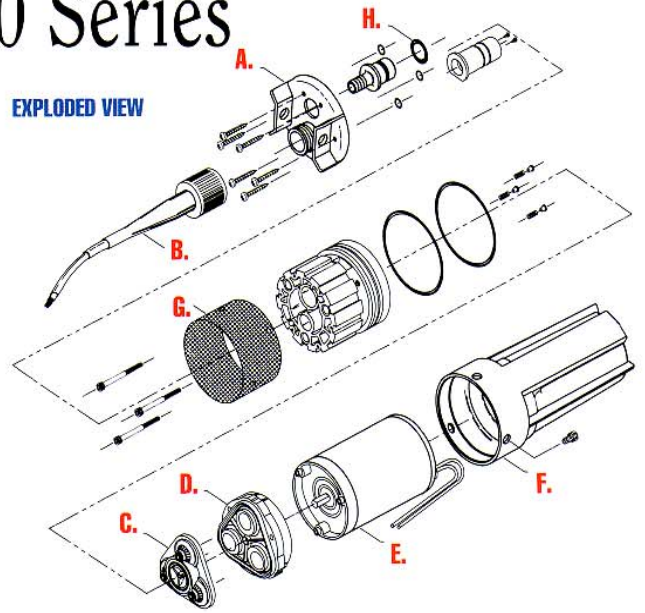

### REPLACEMENT PART KITS:

- |                                |                          |
|--------------------------------|--------------------------|
| (A) LIFT PLATE                 | (F) CANISTER KIT         |
| (B) CABLE PLUG KIT             | (G) FILTER SCREEN KIT    |
| (C) VALVE KIT                  | (H) O-RING KIT           |
| (D) LOWER HOUSING ASSEMBLY KIT | (I) TOOL KIT (NOT SHOWN) |
| (E) MOTOR KIT                  |                          |


\* All kits may consist of more parts than shown in exploded view.

### TECHNICAL SPECIFICATIONS:

<b>MODEL NUMBER</b>	9325-043-101*
<b>PUMP DESIGN</b>	Positive Displacement 3 Chamber Diaphragm Pump
<b>CAM</b>	3.0 Degree
<b>MOTOR</b>	Permanent Magnet, P/N 11-175-00, Thermally Protected
<b>VOLTAGE</b>	24 VDC Nominal
<b>AMPS</b>	4.0 Maximum
<b>INTERNAL BYPASS</b>	105-110 PSI Max. (7.2-7.5 BARS)
<b>MAXIMUM LIFT</b>	230 Feet Maximum (70 Meters)
<b>MAXIMUM SUBMERSION</b>	100 Feet Maximum (30 Meters)
<b>OUTLET PORT</b>	1/2" (12.7mm) Barbed Fitting for 1/2" (12.7mm) I.D. Tubing
<b>INLET</b>	50 Mesh Stainless Steel Screen
<b>MATERIALS</b>	High Strength Engineered Plastics, Stainless Steel Fasteners
<b>TYPICAL APPLICATIONS</b>	Potable Water Well Pump
<b>NET WEIGHT</b>	6 LBS. (2.7 Kgs.)

\*CE Model Available

### DIMENSIONS

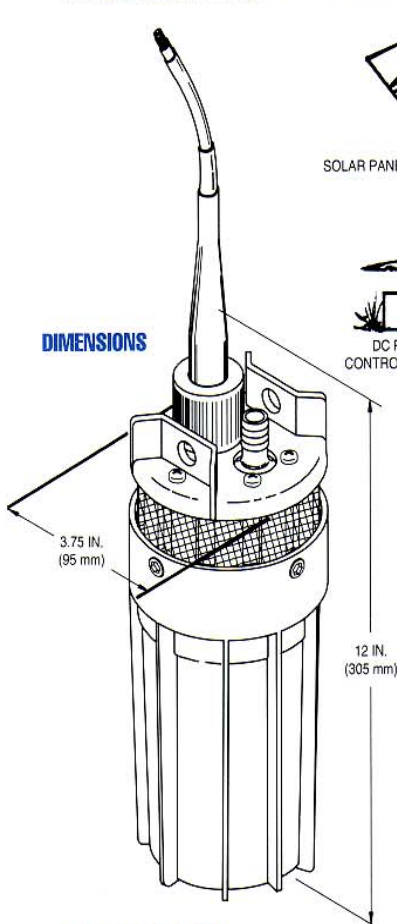

### WELL INSTALLATION

